

# RECORDERGEAR

MODEL

# AC15


1080P AC Adapter  
Hidden Camera



## USER MANUAL

[www.recordergear.com](http://www.recordergear.com)

RecorderGear™ and respective logos are trademarks of  
Teton Webstores LLC ©2017 ALL RIGHTS RESERVED

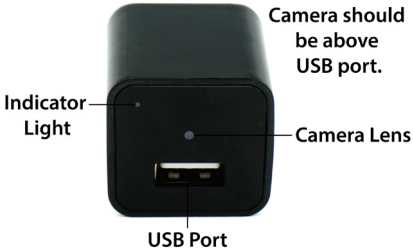

**Indicator  
Light**

**Camera should  
be above  
USB port.**

**Camera Lens**

**USB Port**



MID: M1C  
Made In China

**1 Year Warranty**

All RecorderGear™ brand products are backed by our 1 Year Warranty.  
For full details visit: [www.recordergear.com](http://www.recordergear.com)

---

---

## **This Device is Compliant with USA Surveillance Laws**

---

---

In order to comply with **18 U.S. Code § 2512** federal law, the audio recording function has been removed from the AC15. You can rest assured that this device is 100% legal to use in the USA. Please be familiar with your country and state surveillance laws before using this product. RecorderGear products are sold NOT for illegal use and are sold for their intended legal use only.

# Table of Contents

1 Recording	<b>5</b>
2 Recording/ Resolution settings	<b>7</b>
3 Playback Files	<b>9</b>
4 Time and Date Stamps Settings	<b>10</b>
5 Reset Device	<b>11</b>
6 Specs	<b>12</b>

# 1 Recording

Please follow the instructions in this section before proceeding to other sections.

## **To Start Recording:**

1. Plug in the AC15 into a wall outlet, with camera above the USB plug.
2. The red and blue lights will turn on for 3 seconds and then a blue light will flash 3 times and shut off indicating video recording has begun.

## **NOTE:**

The file will be saved in 3 minute intervals.

## **To Stop Recording:**

1. Unplug the AC15 from the wall outlet.
2. After 3 seconds of being unplugged the indicator light will flash red 3 times indicating the AC15 has powered off and the last recording has been saved.

## 2 Recording/ Resolution Settings

1. Connect the AC15 to a PC via the USB to USB cable.
2. Open the disk that appears on the PC.
3. Open the file named "time.txt".
4. Edit the last line "A1" to one of the settings bellow in the format  
YYYY.MM.DD HH:MM:SS A1

A1= Continuous Recording 1080P

A2= Continuous Recording 720P

A3= Continuous Recording 480P

B1= Motion Detection 1080P

B2= Motion Detection 720P

B3= Motion Detection 480P

5. Save and close the file titled "time.txt".
6. Eject the disk.
7. Disconnect the AC15 from the PC.
8. The changes will take effect on the next use.



# 3 Playback Files

Download videos to a computer and remove from the AC15.

1. Using the included USB to USB cable, plug one end into the AC15 and the other into a PC.
2. The red and blue lights will turn on for 3 seconds and then a blue light will flash 3 times and shut off indicating the AC15 has connected successfully to the PC.
3. Open the Disk that appears on the desktop.
4. Open the "Video" folder to view and manage saved videos.

# 4 Time and Date Stamps Settings

This option allows for editing the date and time of the AC15.

1. Unplug the AC15.
2. Connect the AC15 to a PC via the USB to USB cable.
3. Open the disk that appears on the PC.
4. Open the file named "time.txt".
5. Edit the date / time line which is in the format YYYY-MM-DD and. HH:MM:SS to the current date and time.
6. Save and close the file titled "time.txt".
7. Eject the disk.

8. Disconnect the AC15 from the PC.
9. The changes will take effect on the next use.

## 5 Reset Device

Unplug your AC15 and it will automatically reset.

**NOTE:**

Resetting doesn't delete any stored files.

# 6 Specs

<b>Video Format</b>	AVI
<b>Video Resolution</b>	1080P
<b>Time and date stamp</b>	Yes
<b>Video recording segments</b>	3 mins
<b>Camera angle</b>	45 degrees

<b>Internal Memory</b>	32GB
<b>Loop recording</b>	Yes
<b>Weight</b>	26g
<b>Dimension</b>	28.8 x 30.9 x 34.9mm

MID: M1C CE FC  Made In China

**RECORDERGEAR**  
PROFESSIONAL GRADE SECURITY

**1 Year Warranty**

All RecorderGear™ brand products are backed by our 1 Year Warranty.  
For full details visit: [www.recordergear.com](http://www.recordergear.com)